
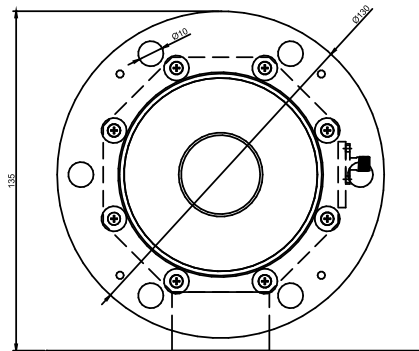


20kW Dual Directional Coupler

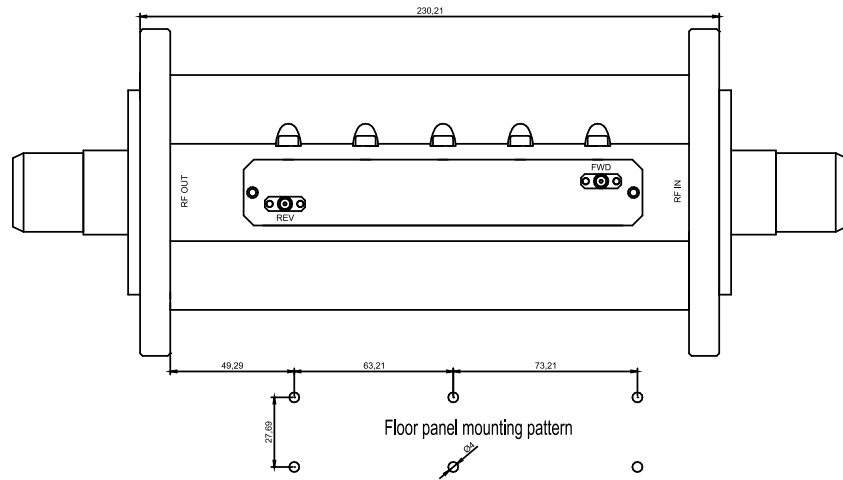


HIGHLIGHTS

- ◆ Rated to 20kW into any VSWR
- ◆ Negligible loss
- ◆ Excellent directivity
- ◆ Rugged construction
- ◆ Wall or floor mount

ITEM	SPECIFICATION	NOTES
Model	SRF20KCPL	
Power	20kW	Into any VSWR
Frequency Range	5 - 32 MHz	
Coupling	-58dB	+/-0.5dB
Flatness	+/- 0.3dB	
Directivity	>30dB	
VSWR	1.1:1 Max	
Insertion Loss	<0.05dB	Typically 0.01dB
Connections	3-1/8 EIA Input/Output SMA FWD and REV samples	

Note: Specifications may change as product evolves. Confirm with factory before order for any critical specifications.

Coupling and Directivity

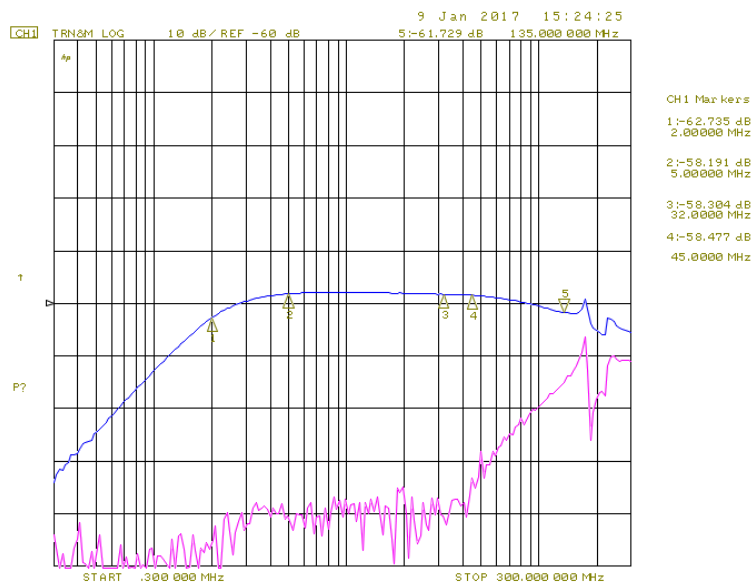

3/5 Ballantyne Street, MAGILL SA 5072
Phone: +618 7225 8385 Email: sales@schachrf.com.au

